


REV	ECN.NO:	BY	DATE
A0	NEW DWG	姜文斌	10.06.08
A1	修改圖紙公差與實物相符	朱利智	11.04.24

NOTES:

- MATERIAL:
 - HOUSING : HIGH TEMPERATURE THERMOPLASTIC, WITH 30% G.F, UL94 V-0; COLOR: SEE NOTES 6
 - CONTACT: COPPER ALLOY
 - SHELL: COPPER ALLOY
- FINISH:
 - CONTACT:
 - GOLD PLATED(SEE TABLE) ON CONTACT AREA.
 - 2.54um [100u"] MIN. TIN PLATED ON SOLDER TAIL AREA.
 - 1.27um [50u"] MIN. NICKEL UNDERPLATED OVERALL.
 - SHELL:
 - 1.27um [50u"] MIN. NICKEL UNDERPLATED OVERALL.
- RECOMMENDED P.C.B THICKNESS : 1.6mm
- OTHER GENERAL SPEC. TO REFER : USB SERIES SPEC.
- FOR WAVE SOLDERING LEAD-FREE PROCESS
- 1421A4-0220-X X X

- R: RoHS
- MATERIAL:
 - HOUSING: PA6T, COLOR: BLACK
- PLATING:
 - CONTACT: Au 1u"
 - CONTACT: Au 3u"
 - CONTACT: Au 6u"
 - CONTACT: Au 15u"
 - CONTACT: Au 30u"

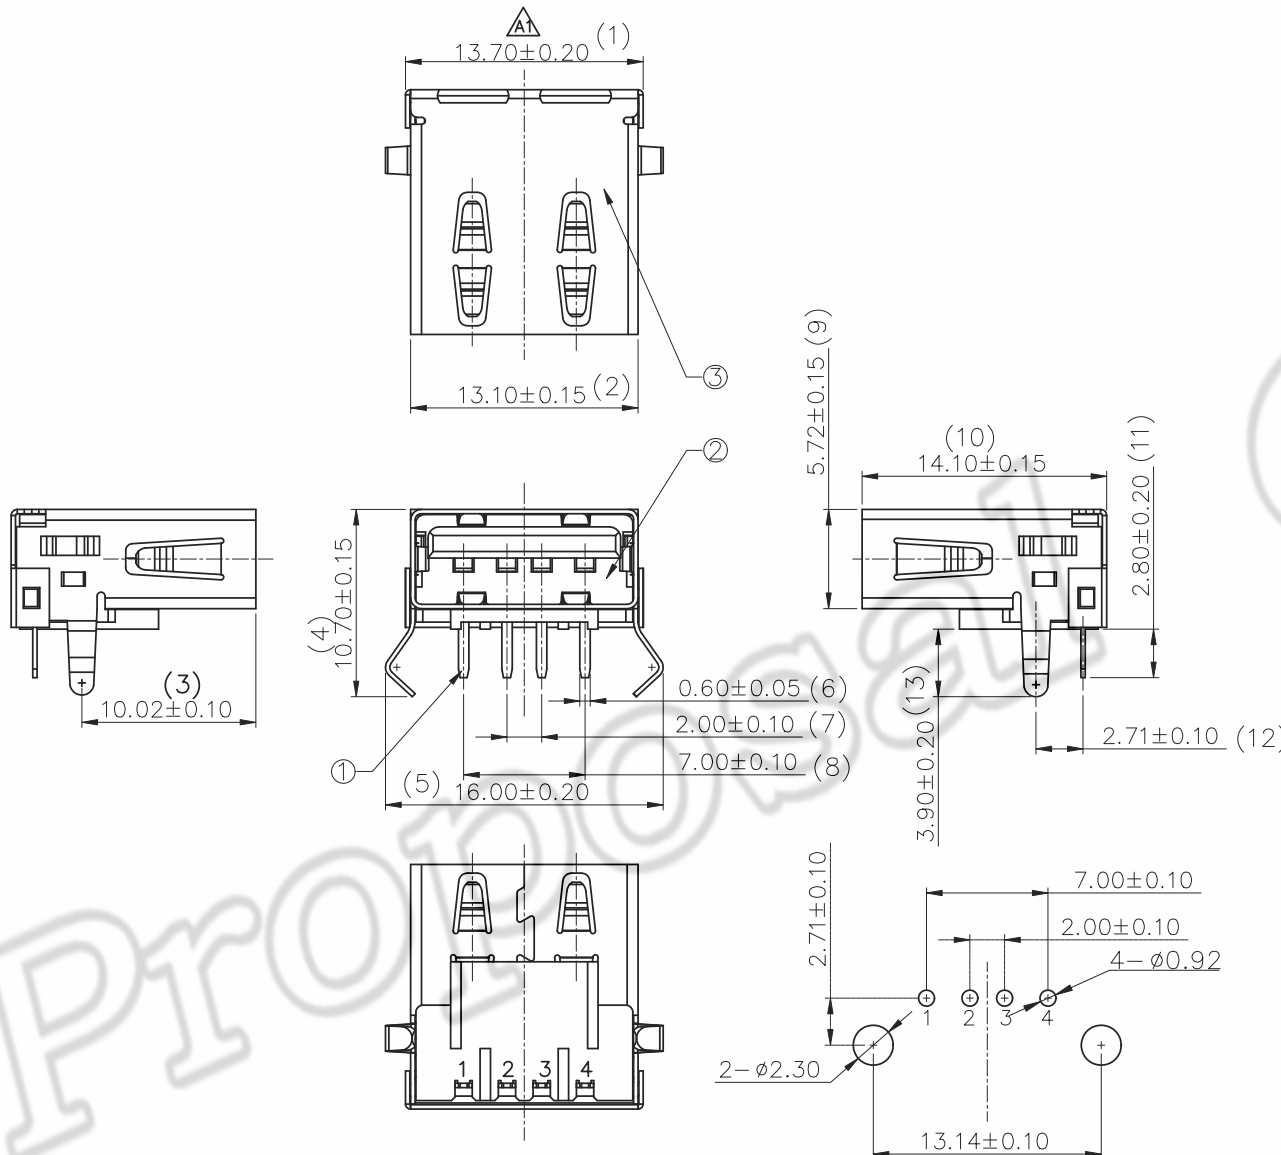

RECOMMENDED PCB LAYOUT
TOP VIEW

TABLE

5	1421A4-0220-59R	Au30u"	PA6T	RoHS
4	1421A4-0220-49R	Au15u"	PA6T	RoHS
3	1421A4-0220-39R	Au6u"	PA6T	RoHS
2	1421A4-0220-29R	Au3u"	PA6T	RoHS
1	1421A4-0220-19R	Au1u"	PA6T	RoHS
NO:	PART NO:	PLATING	MATERIAL	REMARK

COPLIANCE WITH THE REQUIEMENT RoHS HF SONY00259 OTHER
 ※NO USING RESTRICTED AND BANNED SUBSTANCE

3	SHELL	SEE PART DRAWING	NI PLATED	
2	HOUSING	SEE PART DRAWING	UL 94V-0	
1	CONTACT	SEE PART DRAWING	UL 94V-0	
NO:	DESCRIPTION	MATERIAL	COLOR	REMARK

CUSTOMER DRAWING		LITE Liteconn Co.,Ltd.				
-TOLERANCES- UNLESS OTHERWISE SPECIFIED		TITLE: USBA母4PIN90°DIP				
X.X ±0.35	X.X* ±3*	APPD:	DWG NO: 1421A4-0220-XXX			
X.XX ±0.25	X.XX* ±2*	CHECK:	DATE	SCALE	UNIT	PAGE
X.XXX ±0.15	X.XXX* ±1*	DRAW: 敲繼	11.04.24	1:1	MM	1/1